


<b>Applications</b>	Commercial Grade
<b>Feature</b>	<div>No Directivity</div> <div>Wire Wound</div> <div>Ferrite Core</div>
<b>Series   Type</b>	NLV32-PF
<b>Status</b>	<div> Production (Not Recommended for New Design)</div> <div>Recommended Alternate Part No. : <a href="#">NLV32T-4R7J-EF</a> (Interchangeability is not guaranteed.)</div>
<b>Brand</b>	TDK









Size	
Length(L)	3.20mm ±0.20mm
Width(W)	2.50mm ±0.20mm
Thickness   Height	2.20mm ±0.20mm
Recommended Land Pattern (A)	1.20mm Nom.
Recommended Land Pattern (B)	2.00mm Nom.
Recommended Land Pattern (C)	2.00mm Nom.

Electrical Characteristics	
Inductance	4.7μH ±5% at 7.96MHz
Rated Current	220mA
DC Resistance [Typ.]	
DC Resistance [Max.]	1.5Ω
Self Resonant Frequency [Min.]	50MHz
Self Resonant Frequency [Typ.]	
Q [Min.]	30 at 7.96MHz
Q [Typ.]	



Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C
Soldering Method	<div>Wave (Flow)</div> <div>Reflow</div> <div>Iron Soldering</div>
AEC-Q200	NO
Packing	Embossed (Plastic)Taping [180mm Reel]
Package Quantity	2000pcs
Weight	0.05g

! Images are for reference only and show exemplary products.  
! This PDF document was created based on the data listed on the TDK Corporation website.  
! All specifications are subject to change without notice.

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

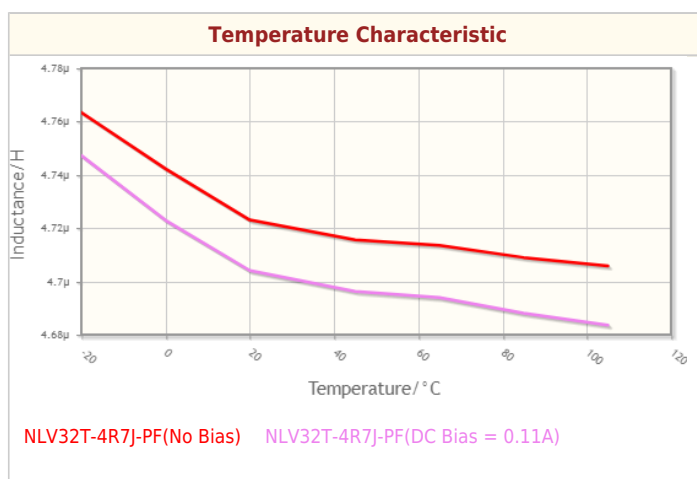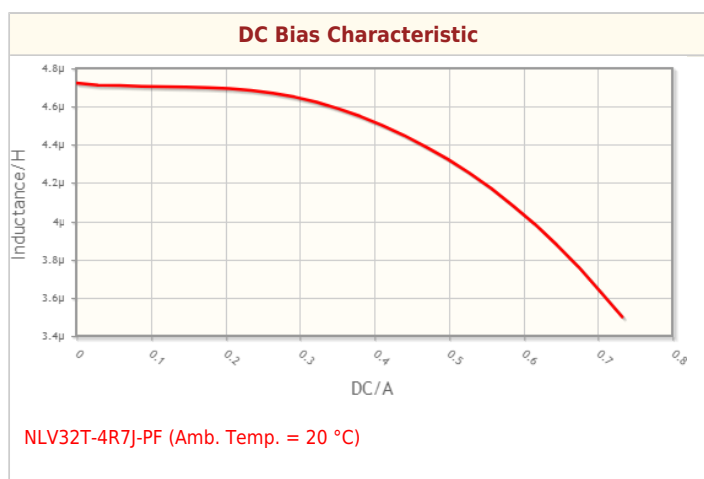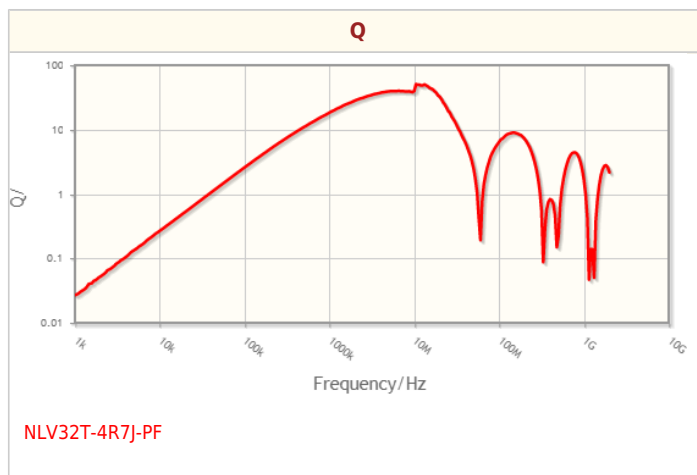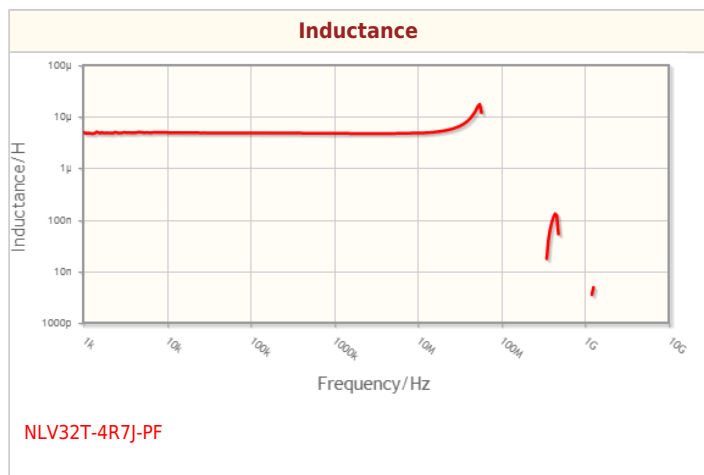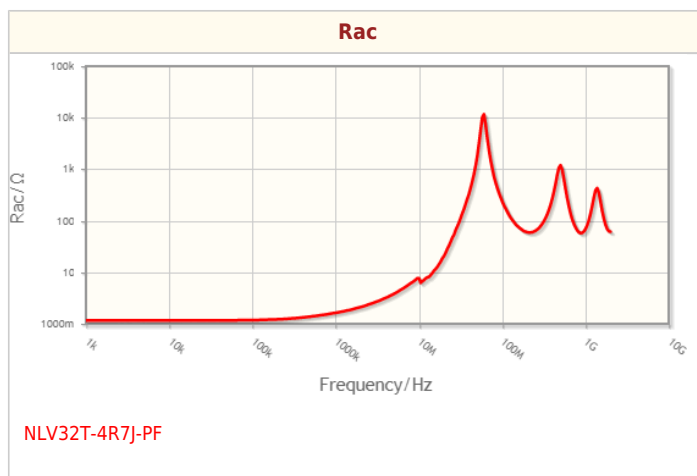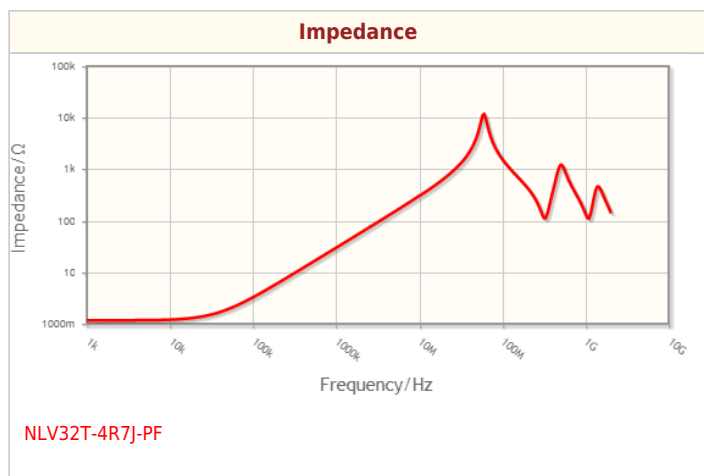

## Associated Images

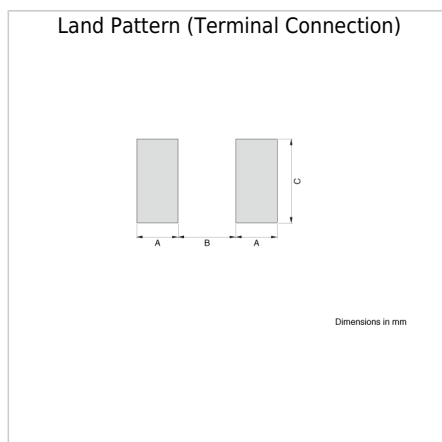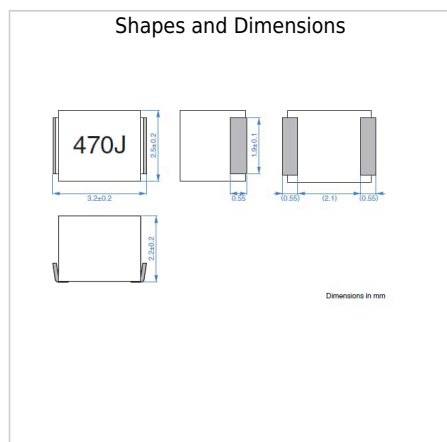

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.